


# MB 2005 Configuration

Standard bandpass: [0.01 .. 27] Hz

Standard sensitivity: 20 mV / Pa

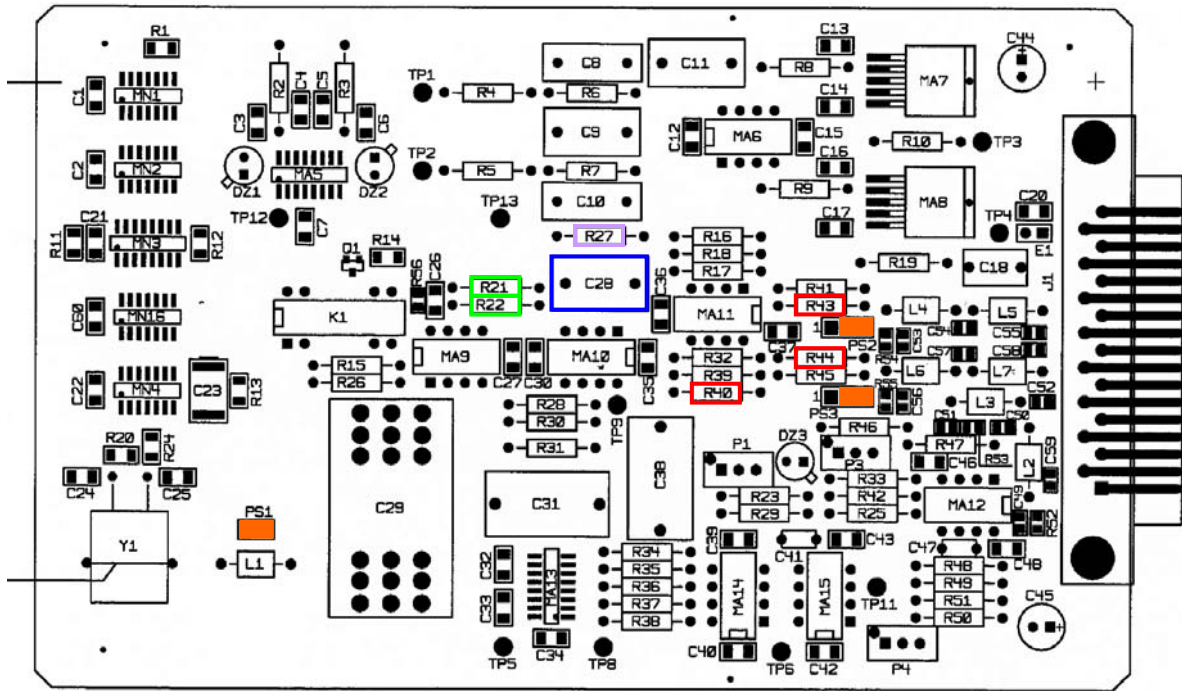

PS-1 : Shorted  
 PS-2 : 2-3 Shorted  
 PS-3 : 2-3 Shorted

	Asymmetrical differential output	Symmetrical differential output
R40 & R43 & R44	4,02 kΩ	None
R21 & R22	4,99 kΩ	1 kΩ
R27	100 kΩ	10 kΩ
C28	47 nF	470 nF